


NOCTI Puzzle

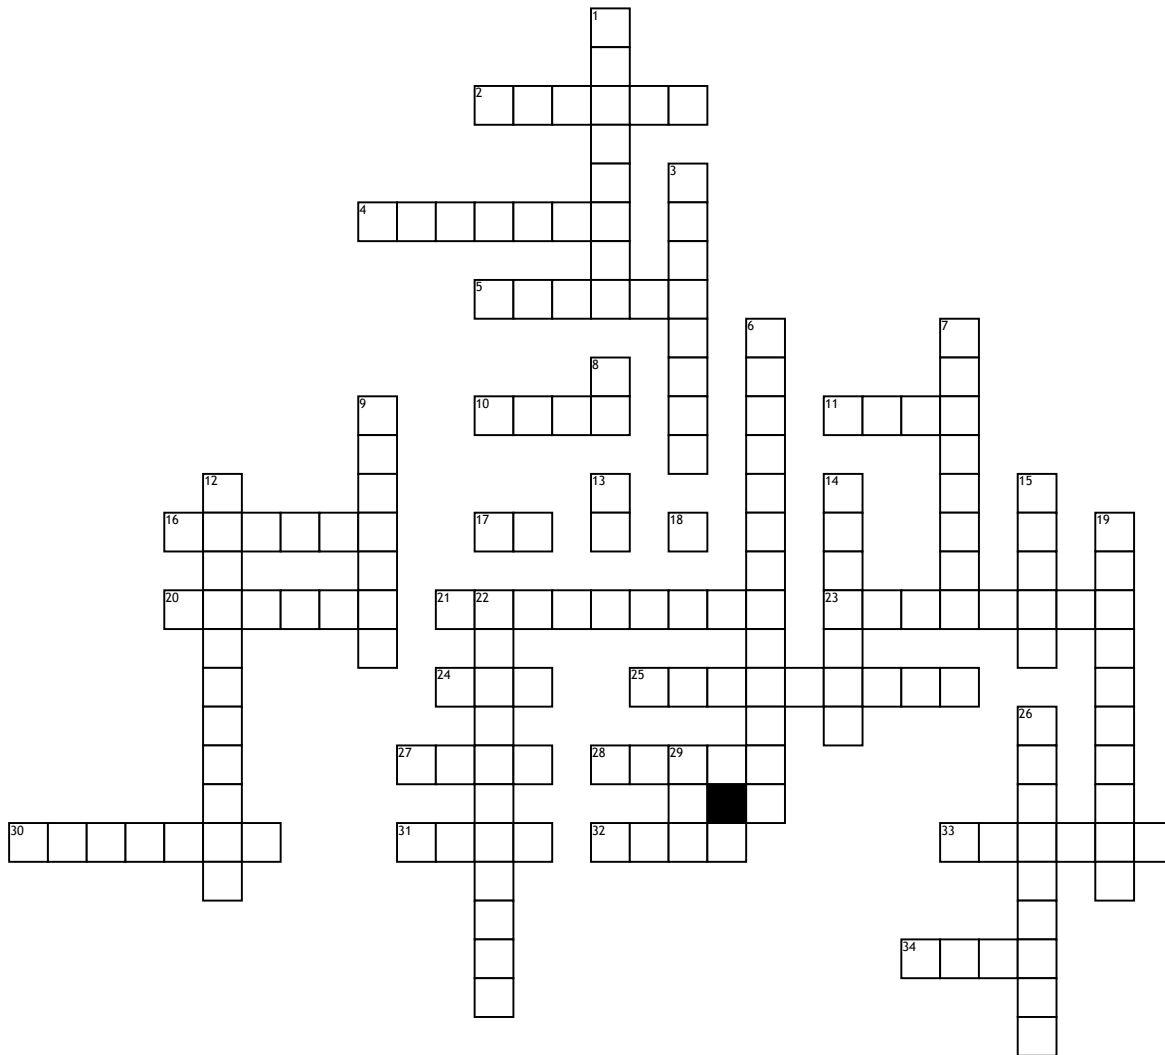

Across

2. What species of wood is classified as hard wood?
4. Booking wallcovering means.....the pasted wallcovering
5. Of the following colors, which will create the impression of warmth?
10. The best conditions for applying varnish are temperatures between..... and... degrees and average humidity
11. A matte finish is also called a/an... finish
16. The way to ensure that wall paper can be easily removed from the wall board is to Apply a before hanging the wallpaper
17. In frame construction to be finished with wallboards, studs should be placed.....of center
20. When pigment is added to a clear coating, it becomes...
21. When using paint or varnish with volatile organic compounds..... the workspace according to instructions
23. A plumb bob is used to establish a..... line
24. The color family of burgundy is...

25. When painting a wall with a window, first painting the wall area around the window trim with a small brush is called....
27. When sanding wood before staining, the worker should sand..... the grain
28. Use...to wash a latex base paint from the roller cover
30. The most common cause of spray gun failure is improperlygun
31. A natural paint brush is a brush that has bristles made from
32. Using a liquid oil-based stain allows deeper penetration into the....
33. A solution of common household bleach and water is best for removing....
34. The government organization whose purpose is to set and inforce worksie safety and health standard is....

Down

1. The best way to quickly apply a flat, even coat of paint on an uneven surface, is to use a
3. The best place to use shellac is on..... wood trim
6. Colors that are opposite each other on the color wheel are

7. To protect lungs when sanding wear an mask
8. Newly poured concrete should dry or cure for at least days before painting
9. The proper angle for setting up a ladder is to place its base a/an..... of the working length of the ladder from the wall or other vertical surface
12. When painting a room, the first step is to place.....
13. A standard American roll of wallpaper contains....square feet
14. When handling solvent based products, wear....resistent chemical gloves
15. To make a room look larger, a painter would use
18. When putting out a fire involving oily rags, use a class... fire extinguisher
19. Steel that has been coated with zinc is known as
22. To avoid electric shock when applying wallpaper turn off theto the room
26. An appropriate brush for painting trim would be a/an....brush
29. Wood that has been filled and sealed carefully requires how many coats of varnish to produce a good finish?