


II PUC

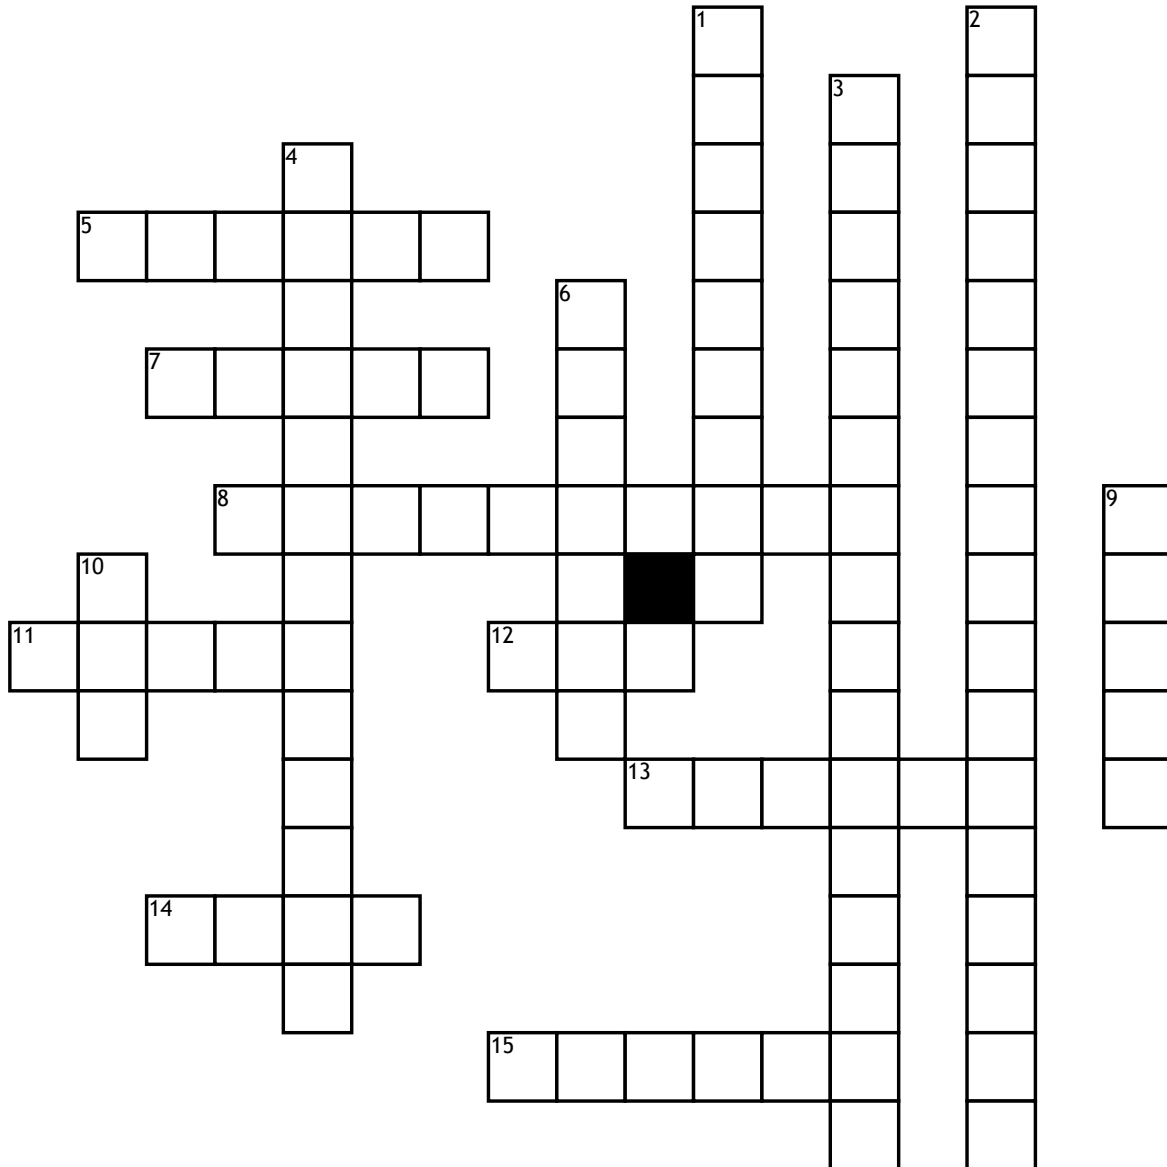

Across

- 5. Set of values for an attribute in that column is
- 7. To solve the tower of Hanoi which data structure is used
- 8. Which file organization is not suitable for online and real time systems.
- 11. High speed memory present inside the cpu
- 12. Operator used to allocate memory dynamically.

- 13. Operator used to deallocate memory dynamically.
 - 14. It is an example for non-linear data structure
 - 15. which data structure in which data is inserted and deleted from different ends?
- Down**
- 1. The most secure level of authorization by using fingerprint, retina etc
 - 2. The technique of collecting deleted space of a node in linked list into free storage is called...

- 3. I have two nodes one for previous node address and another for next node address
- 4. Which constructor can initialize different objects with different values.
- 6. Which variable holds a memory address of another variable in memory?
- 9. Give an example for linear data structure.
- 10. A small computer network with in a building.