


# C++

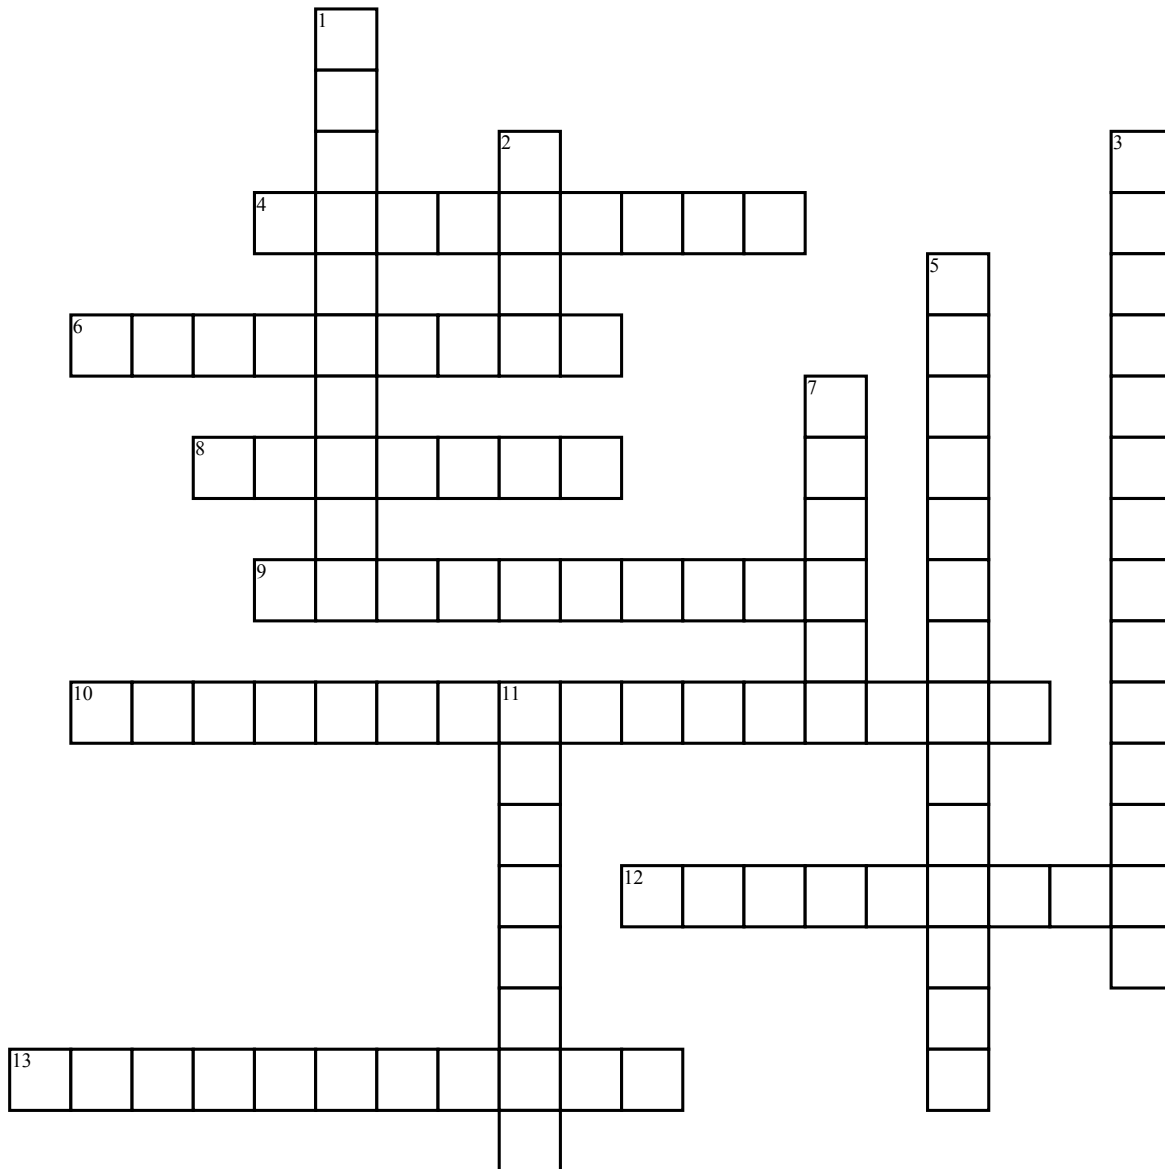

## Across

4. keyword used to provide special access to inherited members

6. A C++ code line ends with \_\_\_\_\_

8. The fields in a class of a c++ program are by default

9. Constructors are used to \_\_\_\_\_ the objects

10. C++ was originally developed by

12. The operator << is called

13. member function with the same name as its class

## Down

1. The operator >> is called

2. A destructor takes \_\_\_\_\_ arguments

3. the code associated with a given procedure call is not known until the time of the call at run time

5. In C++ a function contained with in a class is called

7. A constructor is called whenever \_\_\_\_\_ is declared

11. . Function that serves as a template for creating similar other functions